




SIM868_GNSS_Application Note _V1.00

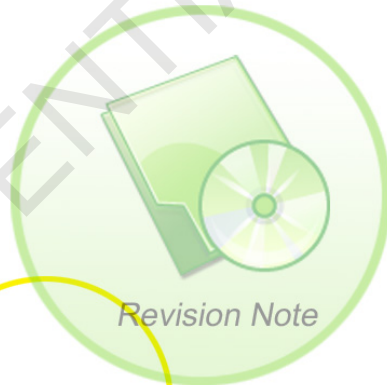

SIMCOM CONFIDENTIAL FILE

Document Title	SIM868 GNSS Application Note
Version	1.00
Date	2017-01-03
Status	Released
Document Control ID	SIM868_GNSS_Application Note_V1.00

General Notes

SIMCom offers this information as a service to its customers, to support application and engineering efforts that use the products designed by SIMCom. The information provided is based upon requirements specifically provided to SIMCom by the customers. SIMCom has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by SIMCom within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

Copyright

This document contains proprietary technical information which is the property of SIMCom Limited., copying of this document and giving it to others and the using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights reserved in the event of grant of a patent or the registration of a utility model or design. All specification supplied herein are subject to change without notice at any time.

Copyright © Shanghai SIMCom Wireless Solutions Ltd. 2017

Contents

1	Introduction	7
2	AT Command	8
2.1	AT+CGNSPWR GNSS power control	8
2.2	AT+CGNSSEQ Define the last NMEA sentence that parsed	9
2.3	AT+CGNSINF GNSS navigation information parsed from NMEA sentences	11
2.4	AT+CGNSURC GNSS navigation, GEO-fences and speed alarm URC report	12
2.5	AT+CGNSCMD Send command to GNSS	13
2.6	AT+CGNSTST Send data received from UART2 to UART1	14
2.7	AT+CGNSCHK Check EPO file property	14
2.8	AT+CGNSDEL Delete EPO file	15
2.9	AT+CGNSIPR Configure UART2 baud rate	16
2.10	AT+CGNSAID Send EPO file to GNSS engine	16
2.11	AT+CRFLOC Give reference location to GNSS engine	17
2.12	AT+CGNSVER Query GNSS version	17
3	CME Error Code	19
4	AT Commands Examples	20
	Appendix	21
A	Related documents	21
B	Terms and Abbreviations	21

Tables

TABLE 2-1: PARSED NMEA MESSAGE.....	9
TABLE 2-2: PARSED GNSS NAVIGATION PARAMETERS.....	10
TABLE 2-3: AT+CGNSINF RETURN PARAMETERS.....	11

Figures

FIGURE 1-1 SIM868 SYSTEM CONNECTION	7
-------------------------------------	---

SIMCOM CONFIDENTIAL FILE

Version History

Date	Version	Description of change	Author
2017-01-03	1.00	New version	Xiping.li

Scope

This document presents the AT command of GNSS function and application examples. The document can apply to SIM868 module with hardware release version is V2.01 and above and the software release version is 1418B03SIM868M32 and later.

1 Introduction

SIM868 module combines GNSS technology for satellite navigation. Featuring an industry-standard interface and GNSS function, it allows variable assets to be tracked seamlessly at any location and anytime with signal coverage.

GNSS application provides a method to interact with a GNSS module.

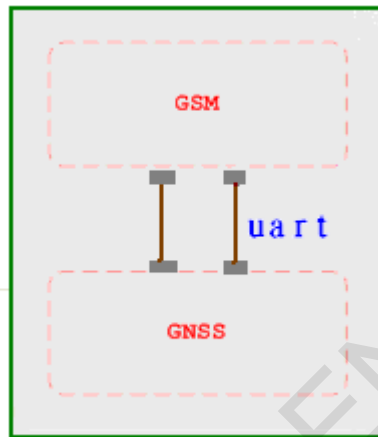


Figure 1-1 SIM868 System connection

For hardware design, please refer to SIM868_Hardware_Design_V1.02 "All-in-one mode".

2 AT Command

SIM868 module provides GNSS AT command sets as below.

Commands	Description
AT+CGNSPWR	GNSS power control
AT+CGNSSEQ	Define the last NMEA sentence that parsed
AT+CGNSINF	GNSS navigation information parsed from NMEA sentences
AT+CGNSURC	GNSS navigation, GEO-fence and speed alarm URC report control
AT+CGNSCMD	Send command to GNSS
AT+CGNSTST	Send data received from GNSS to AT UART
AT+CGNSCHK	Check EPO file property
AT+CGNSDEL	Delete EPO file
AT+CGNSIPR	Configure UART2 baud rate
AT+CGNSAID	Send EPO file to GNSS engine
AT+CRFLOC	Give reference location to GNSS engine
AT+CGNSVER	Query GNSS version

2.1 AT+CGNSPWR GNSS power control

AT+CGNSPWR GNSS power control	
Test Command AT+CGNSPWR=?	Response +CGNSPWR: (list of supported <mode>s) OK
Parameters See Write Command	
Read Command AT+CGNSPWR?	Response TA returns the current status of GNSS Power supply. +CGNSPWR: <mode> OK
Parameters See Write Command	
Write Command AT+CGNSPWR=<mode>	Response GNSS POWER CONTROL ON/OFF OK or ERROR

	<p>Parameters</p> <p><mode> 0 Turn off GNSS power supply 1 Turn on GNSS power supply</p>
Parameter Saving Mode	NO_SAVE
Reference	

2.2 AT+CGNSSEQ Define the last NMEA sentence that parsed

AT+CGNSSEQ Define the last NMEA sentence that parsed	
<p>Test Command</p> <p>AT+CGNSSEQ=?</p>	<p>Response</p> <p>+CGNSSEQ: (GGA,GSA,RMC,GSV)</p> <p>OK</p> <p>Parameters</p> <p>See Write Command</p>
<p>Read Command</p> <p>AT+CGNSSEQ?</p>	<p>Response</p> <p>TA returns the current setting of last sentence parsed: +CGNSSEQ: <last sentence></p> <p>OK</p> <p>Parameters</p> <p>See Write Command</p>
<p>Write Command</p> <p>AT+CGNSSEQ=<last sentence></p>	<p>Response</p> <p>OK or ERROR</p> <p>Parameters</p> <p><last sentence> is a string type parameter.</p> <p>"GGA" refer to "GPGGA" or "GLGGA" or "GNGGA" "GSA" refer to "GPGSA" or "GLGSA" or "GNGSA" "GSV" refer to "GPGSV" or "GLGSV" or "GNGSV" "RMC" refer to "GPRMC" or "GLRMC" or "GNRMC"</p>
Parameter Saving Mode	NO_SAVE
Reference	<p>Note</p> <p>Factory setting is: AT+CGNSSEQ="RMC".</p>

Table 2-1: parsed NMEA message

Message	Description	Possible Talker Identifiers
GGA	Time, position and fix type data	GP
GSA	GNSS receiver operating mode, satellites used in the	GP, GN

	position solution, and DOP values	
GSV	Number of GNSS satellites in view satellite ID numbers, elevation, azimuth, & SNR values	GP, GL, GN
RMC	Time, date, position, course and speed data	GP, GN

Table 2-2: parsed GNSS navigation parameters

Parameters	Description
UTC Time	Parsed from "\$--RMC" NMEA sentence
fix status	Parsed from "\$--RMC" NMEA sentence
Latitude	Parsed from "\$--RMC" NMEA sentence
N/S Indicator	Parsed from "\$--RMC" NMEA sentence
Longitude	Parsed from "\$--RMC" NMEA sentence
E/W Indicator	Parsed from "\$--RMC" NMEA sentence
Speed Over Ground	Parsed from "\$--RMC" NMEA sentence
Course Over Ground	Parsed from "\$--RMC" NMEA sentence
Date	Parsed from "\$--RMC" NMEA sentence
Magnetic Variation	Reserved
East/West Indicator	Reserved
RMC mode	Parsed from "\$--GGA" NMEA sentence
HDOP	Parsed from "\$--GGA" NMEA sentence
MSL Altitude	Parsed from "\$--GGA" NMEA sentence
Units	Parsed from "\$--GGA" NMEA sentence
Geoid Separation	Reserved
Units	Reserved
Age of Diff. Corr.	Reserved
Diff. Ref. Station ID	Reserved
Satellites Used	Parsed from "\$--GGA" NMEA sentence
PDOP	Parsed from "\$--GGA" NMEA sentence
VDOP	Parsed from "\$--GGA" NMEA sentence

Satellites in View	Parsed from "\$--GSV" NMEA sentence
HPA	Reserved
VPA	Reserved

2.3 AT+CGNSINF GNSS navigation information parsed from NMEA sentences

AT+CGNSINF GNSS navigation information parsed from NMEA sentences	
Execution Command AT+CGNSINF	<p>Response</p> <p>+CGNSINF: <GNSS run status>,<Fix status>,<UTC date & Time>,<Latitude>,<Longitude>,<MSL Altitude>,<Speed Over Ground>,<Course Over Ground>,<Fix Mode>,<Reserved1>,<HDOP>,<PDOP>,<VDOP>,<Reserved2>,<GNSS Satellites in View>,<GNSS Satellites Used>,<GLONASS Satellites Used>,<Reserved3>,<C/N0 max>,<HPA>,<VPA></p> <p>OK</p> <p>Parameters</p> <p><GNSS run status></p> <p>0 GNSS off</p> <p>1 GNSS on</p> <p><Fix status></p> <p>0 Not fixed position</p> <p>1 Fixed position</p> <p>See below table 2-3.</p>
Parameter Saving Mode	NO_SAVE
Reference	

Table 2-3: AT+CGNSINF return Parameters

Index	Parameter	Unit	Range	Length
1	GNSS run status	--	0-1	1
2	Fix status	--	0-1	1
3	UTC date & Time	yyyyMMddhh mmss.sss	yyyy: [1980,2039] MM : [1,12] dd: [1,31] hh: [0,23] mm: [0,59] ss.sss:[0.000,60.999]	18
4	Latitude	±dd.dddddd	[-90.000000,90.000000]	10
5	Longitude	±ddd.dddddd	[-180.000000,180.000000]	11
6	MSL Altitude	meters		8

7	Speed Over Ground	Km/hour	[0,999.99]	6
8	Course Over Ground	degrees	[0,360.00]	6
9	Fix Mode	--	0,1,2 ^[1]	1
10	Reserved1			0
11	HDOP	--	[0,99.9]	4
12	PDOP	--	[0,99.9]	4
13	VDOP	--	[0,99.9]	4
14	Reserved2			0
15	GPS Satellites in View	--	[0,99]	2
16	GNSS Satellites Used	--	[0,99]	2
17	GLONASS Satellites in View	--	[0,99]	2
18	Reserved3			0
19	C/N0 max	dBHz	[0,55]	2
20	HPA ^[2]	meters	[0,9999.9]	6
21	VPA ^[2]	meters	[0,9999.9]	6
Total: (94) chars				

Note:

1. The range of <Fix Mode> depends on the GNSS chip used.
2. Reserved.

2.4 AT+CGNSURC GNSS navigation, GEO-fences and speed alarm URC report

AT+CGNSURC GNSS navigation, GEO-fences and speed alarm URC report	
Test Command AT+CGNSURC=?	Response +CGNSURC: (0-255) OK
	Parameters See Write Command
Read Command AT+CGNSURC?	Response TA returns the current URC setting +CGNSURC: <Navigation mode> OK
	Parameters See Write Command
	Unsolicited Result Code +UGNSINF: <GNSS run status>,<Fix status>,

	<p><UTC date & Time>,<Latitude>,<Longitude>, <MSL Altitude>,<Speed Over Ground>, <Course Over Ground>, <Fix Mode>,<Reserved1>,<HDOP>,<PDOP>, <VDOP>,<Reserved2>,<Satellites in View>, <Satellites Used>,<Reserved3>,<C/N0 max>,<HPA>,<VPA></p>
Write Command AT+CGNSURC=<Navigation mode>	<p>Response OK or ERROR</p> <p>Parameters <Navigation mode> 0 Turn off navigation data URC report 1 Turn on navigation data URC report, and report every GNSS FIX 2 Turn on navigation data URC report, and report every 2 GNSS FIX ... 255 Turn on navigation data URC report, and report every 255 GNSS FIX</p>
Parameter Saving Mode	NO_SAVE
Reference	<p>Note</p> <ul style="list-style-type: none"> ● Factory setting is "AT+CGNSURC=0". ● URC "+UGNSINF: "parameters are the same as "+CGNSINF:" return.

2.5 AT+CGNSCMD Send command to GNSS

AT+CGNSCMD Send command to GNSS	
Test Command AT+CGNSCMD=?	<p>Response +CGNSCMD: (0-1),"CmdString"</p> <p>OK</p> <p>Parameters See Write Command</p>
Write Command AT+CGNSCMD=<Cmdtype>,<CmdString>	<p>Response If send ok: OK If send false: ERROR</p> <p>Parameters <CmdType> 0 NMEA style command 1 HEX style command</p>

	<p><CmdString> command string</p> <p>For example, if you want to send "\$PMTK000*32<CR><LF>" command to GNSS:</p> <p>You can use:</p> <p>AT+CGNSCMD=0,"\$PMTK000*32"</p> <p>Or:</p> <p>AT+CGNSCMD=1,"24504D544B3030302A33320D0A"</p>
Parameter Saving Mode	NO_SAVE
Reference	<p>Note</p> <p>Max length of <CmdString> is 258.</p>

2.6 AT+CGNSTST Send data received from UART2 to UART1

AT+CGNSTST Send data received from UART2 (GNSS) to AT UART	
<p>Test Command</p> <p>AT+CGNSTST=?</p>	<p>Response</p> <p>+CGNSTST: (0-1)</p> <p>OK</p> <p>Parameters</p> <p>See Write Command</p>
<p>Read Command</p> <p>AT+CGNSTST?</p>	<p>Response</p> <p>GNSS test mode on/off</p> <p>+CGNSTST: <mode></p> <p>OK</p> <p>Parameters</p> <p>See Write Command</p>
<p>Write Command</p> <p>AT+CGNSTST=<mode></p>	<p>Response</p> <p>OK</p> <p>or</p> <p>ERROR</p> <p>Parameters</p> <p><mode></p> <p>0 Switch off</p> <p>1 Switch on</p>
Parameter Saving Mode	NO_SAVE
Reference	<p>Note</p> <p>This command is used for test.</p>

2.7 AT+CGNSCHK Check EPO file property

AT+CGNSDEL Check EPO file property	
------------------------------------	--

Test Command AT+CGNSCHK=?	Response +CGNSCHK: (1-3) (0-1) OK
	Parameters See Write Command
Write Command AT+CGNSCHK=<mode>,<time>	Response +CGNSCHK: <epofile>,<exist>,<size>,<available hours> OK or ERROR
	Parameters <mode> 1 and 2 Reserved 3 EPO file <time> 0 or empty will not display expiration date 1 will display EPO file available hours
Parameter Saving Mode	NO_SAVE

2.8 AT+CGNSDEL Delete EPO file

AT+CGNSDEL Delete EPO file	
Test Command AT+CGNSDEL=?	Response +CGNSDEL: (1-3) OK
	Parameters See Write Command
Write Command AT+CGNSDEL=<mode>	Response If send ok: OK If send false: ERROR
	Parameters <mode> 1 and 2 Reserved 3 EPO file
Parameter Saving Mode	NO_SAVE
Reference	Note <ul style="list-style-type: none"> EPO file path is "C:\user\". Max length of <CmdString> is 258.

2.9 AT+CGNSIPR Configure UART2 baud rate

AT+CGNSIPR Configure UART2 baud rate to communicate with GNSS engine	
Test Command AT+CGNSIPR=?	Response +CGNSIPR: (4800,9600,19200,38400,57600,115200,230400,460800) OK
	Parameters See Write Command
Read Command AT+CGNSIPR?	Response +CGNSIPR: 115200 OK
	Parameters See Write Command
Write Command AT+CGNSIPR=<IPR>	Response OK ERROR
	Parameters <IPR> 4800 9600 19200 38400 57600 <u>115200</u> 230400 460800
Parameter Saving Mode	NO_SAVE
Reference	Note This command is used for test.

2.10 AT+CGNSAID Send EPO file to GNSS engine

AT+CGNSAID send EPO file to GNSS engine	
Test Command AT+CGNSAID=?	Response +CGNSAID: (0-31)(0-1)(0-1)(0-720) OK
	Parameters See Write Command
Write Command AT+CGNSAID=<mode> ,<time>,<epo>,<Reserve	Response OK or

d>	ERROR
	Parameters <mode> 0-30 Reserved 31 send <time> 0 Do not synchronize GNSS UTC time 1 Synchronize GNSS UTC time <epo> 0 Do not synchronize epo file 1 Synchronize epo file <Reserved> Reserved
Parameter Saving Mode	NO_SAVE
Reference	Note This command is used for test.

2.11 AT+CRFLOC Give reference location to GNSS engine

AT+CRFLOC give reference location to GNSS engine	
Test Command AT+CRFLOC=?	Response +CRFLOC: "location" OK
	Parameters See Write Command
Write Command AT+CRFLOC="<LAT> ,<LON>"	Response OK or ERROR
	Parameters LAT: Latitude LON: Longitude
Parameter Saving Mode	NO_SAVE
Reference	Note This command is used for test.

2.12 AT+CGNSVER Query GNSS version

AT+CGNSVER Query GNSS version	
Execution Command AT+CGNSVER	Response OK Version1,0000,version2 ERROR

Reference	Note
	This command is used for test.

SIMCOM CONFIDENTIAL FILE

3 CME Error Code

The following errors are related to GPS. The format is like this: **+CME ERROR: <err>**. The detail error code and description is list in the following table.

Code	Description
895	GNSS baud rate selected by HW
891	GNSS data check sum err

SIMCOM CONFIDENTIAL FILE

4 AT Commands Examples

Demonstration	Syntax	Expect Result
Turn on GNSS power	AT+CGNSPWR=1	OK
Turn off GNSS power	AT+CGNSPWR=0	OK
Define the last NMEA sentence that parsed	AT+CGNSSEQ="RMC"	OK
Read GNSS navigation information	AT+CGNSINF	+CGNSINF: 1,1,20150327014838.000,31.2 21783,121.354528,114.600,0. 28,0.0,1,,1.9,2.2,1.0,,8,4,,42,, OK
Set URC reporting every 2(1-255) GNSS fix	AT+CGNSURC=2	OK
Turn off URC reporting	AT+CGNSURC=0	OK
Send Command to GNSS	AT+CGNSCMD=0,"\$PMTK000*32"	OK
Send NMEA data to AT UART	AT+CGNSTST=1	OK
Check EPO file property	AT+CGNSCHK=3,1	+CGNSCHK: 3,1,9216,0 OK
Delete EPO file	AT+CGNSDEL=3	+CGNSDEL: 3,1,9216 OK
Configure UART2 baud rate	AT+CGNSIPR=9600	OK
Send EPO file to GNSS engine	AT+CGNSAID=31,1,1	OK
Give reference location to GNSS engine	AT+CRFLOC="31.133300,121.212659"	OK
Query GNSS version	AT+CGNSVER	AXN_3.82_3333_16103100,000,,1.0*04 OK

Appendix

A Related documents

SN	Document name	Remark
[1]		

B Terms and Abbreviations

Abbreviation	Definition
APN	Access Point Name
URC	Unsolicited Result Code
FTP	File Transfer Protocol
GGA	Global Positioning System Fixed Data
GLL	Geographic Position - Latitude/Longitude
GNSS	Global Navigation Satellite System
GPS	Global Positioning System
AGPS	Assisted GPS
DGPS	Differential Global Positioning System
GPRS	General Packet Radio Service
GSA	GNSS DOP and Active Satellites
GSV	GNSS Satellites in View
HPA	Horizontal Position Accuracy
VPA	Vertical Position Accuracy
GEO-Fence	A geographic area
HDOP	Horizontal Dilution of Precision
HTTP	Hypertext Transfer Protocol
NMEA	National Marine Electronics Association
PDOP	Position Dilution of Precision
PDP	Packet Data Protocol
RMC	Recommended Minimum Specific GNSS Data
VDOP	Vertical Dilution of Precision
VTG	Course Over Ground and Ground Speed
ZDA	Time & Date
EPO	Extended Prediction Orbit

Contact us:

Shanghai SIMCom Wireless Solutions Co.,Ltd.

Address: Building A, SIM Technology Building, No. 633, Jinzhong Road, Shanghai, P.
R. China 200335

Tel: +86 21 3252 3300

Fax: +86 21 3252 3020

URL: www.simcomm2m.com

SIMCOM CONFIDENTIAL FILE